
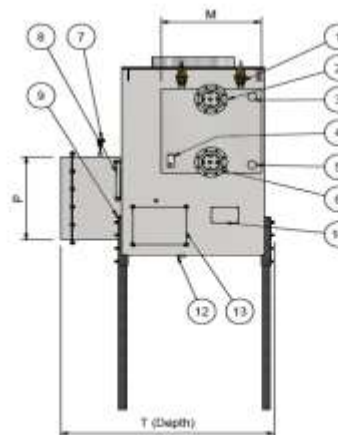
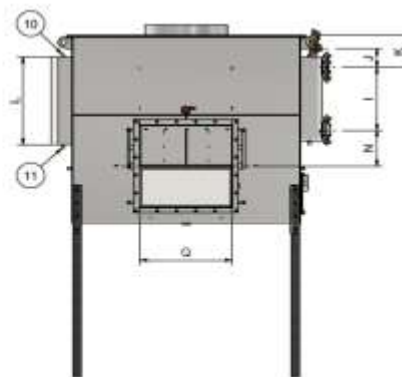
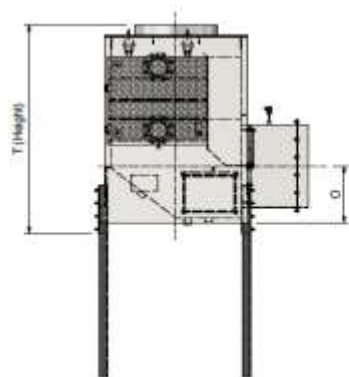
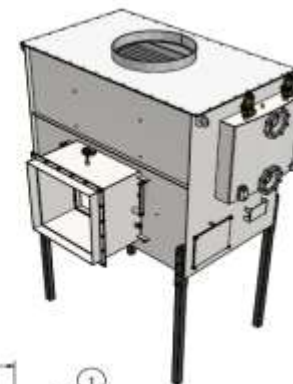


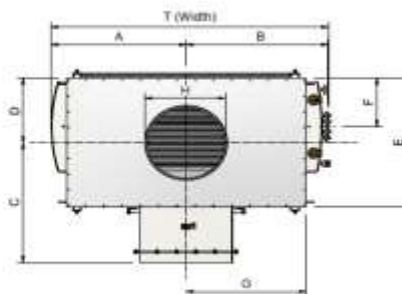

Design pressure 3 bar
Max water temperature 95°

Nr.	description
1	Safety valve 3 Bar/30PSI 1½"-1½"
2	Flange
3	Temperature Gauge ½"
4	Thermostat ½"
5	Temperature Gauge ½"
6	Flange
7	Pressure Gauge ½"
8	Flue gas valve control
9	Limit switch
10	Air vent nipple 1 pcs left and 1 pcs right ¾"
11	Drain plug 1 pcs left and 1 pcs right ½"
12	condensation drain 2"
13	Inspection hatch
14	Type plate

Type	A	B	C	D	E	F	G	H	I	N	O	P	Q	(T)ransport (H*W*D)	Weight BRC	Heated surface (mtr ²)	Fluegas sided restistance (mbar)	Flange size	Condensor capacity in kW	Boiler capacity in kW	Safety valve (Watts)	Drain connection	Flow ΔT=10°C	Water side resistance
BRC- 1,0	690 mm	735 mm	752 mm	304 mm	624 mm	208 mm	573 mm	360 mm	408 mm	323 mm	326 mm	500 mm	500 mm	1452x1425x 1025 mm	497 kg	90	2,7	DN80	128	1163	1 pcs 1½" x 1½"	2"	10 Mtr ³	38
BRC- 1,5	710 mm	756 mm	846 mm	407 mm	813 mm	316 mm	573 mm	410 mm	546 mm	185 mm	331 mm	500 mm	500 mm	1452x1466x1183 mm	608 kg	135	2,8	DN80	192	1745	1 pcs 1½" x 1½"	2"	15 Mtr ³	37
BRC- 2,0	710 mm	756 mm	846 mm	436 mm	813 mm	316 mm	573 mm	510 mm	546 mm	185 mm	326 mm	500 mm	500 mm	1452x1466x1183 mm	659 kg	180	3,7	DN100	256	2326	1 pcs 1½" x 1½"	2"	20 Mtr ³	47
BRC- 2,5	883 mm	920 mm	880 mm	440 mm	880 mm	316 mm	737 mm	510 mm	608 mm	301 mm	392 mm	600 mm	600 mm	1710x1795x1250 mm	1000 kg	212	4	DN100	320	2907	1 pcs 1½" x 1½"	2"	25 Mtr ³	44
BRC- 3,0	883 mm	920 mm	880 mm	440 mm	880 mm	316 mm	737 mm	510 mm	608 mm	301 mm	392 mm	600 mm	600 mm	1710x1795x1250 mm	1100 kg	248	4,2	DN100	384	3489	1 pcs 1½" x 1½"	2"	30 Mtr ³	49
BRC- 3,5	871 mm	922 mm	863 mm	453 mm	857 mm	380 mm	697 mm	510 mm	648 mm	328 mm	487 mm	600 mm	600 mm	1836x1792x1312 mm	1220 kg	319	4,3	DN100	448	4070	1 pcs 1½" x 1½"	2"	35 Mtr ³	54
BRC- 4,0	1031 mm	1077 mm	985 mm	500 mm	1000 mm	375 mm	892 mm	610 mm	648 mm	332 mm	505 mm	700 mm	700 mm	1960x2108x1455 mm	1330 kg	344	4,6	DN125	512	4652	1 pcs 1½" x 1½"	2"	40 Mtr ³	61
BRC- 5,0	1020 mm	1072 mm	985 mm	500 mm	1000 mm	390 mm	892 mm	610 mm	648 mm	332 mm	505 mm	700 mm	700 mm	1960x2108x1455 mm	1450 kg	430	4,8	DN125	640	5814	1 pcs 1½" x 1½"	2"	50 Mtr ³	66
BRC- 6,0	1088 mm	1035 mm	1050 mm	565 mm	1133 mm	476 mm	892 mm	610 mm	608 mm	347 mm	552 mm	700 mm	700 mm	2005x2120x1695 mm	1600 kg	517	4,9	DN125	768	6978	1 pcs 1½" x 1½"	2"	60 Mtr ³	74
BRC- 7,0	1182 mm	1235 mm	1153 mm	623 mm	1245 mm	466 mm	1044 mm	710 mm	601 mm	347 mm	545 mm	800 mm	800 mm	2006x2420x1727 mm	2000 kg	608	5,1	DN150	895	8140	2 pcs 1½" x 1½"	2"	70 Mtr ³	79
BRC- 8,0	1182 mm	1235 mm	1153 mm	623 mm	1225 mm	476 mm	1045 mm	710 mm	648 mm	333 mm	545 mm	800 mm	800 mm	2006x2420x1854 mm	2100 kg	658	5,3	DN150	1023	9304	2 pcs 1½" x 1½"	2"	80 Mtr ³	81
BRC- 9,0	1194 mm	1235 mm	1153 mm	623 mm	1245 mm	535 mm	1045 mm	810 mm	628 mm	338 mm	545 mm	910 mm	910 mm	2006x2420x1755 mm	2200 kg	760	5,4	DN150	1151	10467	2 pcs 1½" x 1½"	2"	90 Mtr ³	83
BRC- 10,0	1186 mm	1234 mm	1116 mm	692 mm	1273 mm	540 mm	1044 mm	810 mm	928 mm	109 mm	543 mm	910 mm	910 mm	2106x2417x1628 mm	2300 kg	878	5,3	DN150	1279	11630	2 pcs 1½" x 1½"	2"	100 Mtr ³	86
BRC- 11,0	1186 mm	1234 mm	1116 mm	692 mm	1273 mm	540 mm	1044 mm	910 mm	928 mm	109 mm	543 mm	910 mm	1100 mm	2106x2417x2106 mm	2400 kg	945	5,4	DN150	1407	12793	2 pcs 1½" x 1½"	2"	110 Mtr ³	89
BRC- 12,0	1186 mm	1234 mm	1116 mm	692 mm	1273 mm	540 mm	1044 mm	910 mm	928 mm	109 mm	543 mm	910 mm	1100 mm	2106x2417x2106 mm	2500 kg	1013	5,5	DN150	1535	13956	2 pcs 1½" x 1½"	2"	120 Mtr ³	92